

# CM-FP3

Fire Manual Call Point

ISO9001

Approvals:CE

# CM-FP116

Fire Manual Call Point

ISO9001






## ■ ADVANTAGES of CM-FP3

- \* Reusable: No glass to break. No consumables. Durable plastic push cover is reusable.
- \* Easy auto-reset: By pushing reset button to return to normal working condition.
- \* Phone jack function: For stable communication in any urgent time.

## ■ INFORMATION

CM-FP3	Fire Manual Call Point
CM-FP3B	Fire Manual Call Point with box
CM-FP116	Fire Manual Call Point(Glass)

## ■ CM-FP3

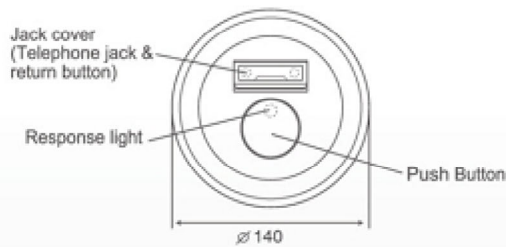


Unit : mm

## ■ SPECIFICATION

MODEL NO.	CM-FP3	CM-FP116
VOLTAGE RANGE	24V DC	
ALARM CURRENT	30 mA	-
CONTACT RATING	24V DC 100mA	36V DC 3A
SUB-FUNCTION	Phone jack : Confirmation LED : Reset button	-
OPTION	Fire manual box	Glass : Cover
MATERIAL	Burning -Proof plastics	
DIMENSIONS	Φ 140 (mm)	86(L)×86(W)×50(H)mm
WEIGHT	149g	200g
COLOR	Red	

## ■ CM-FP116

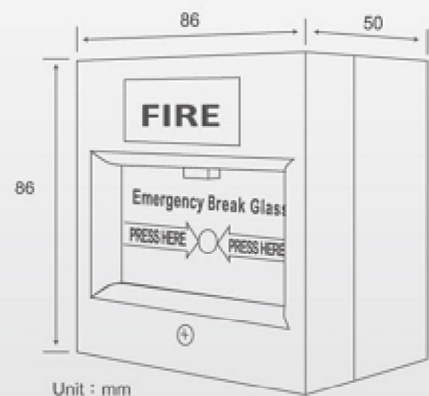

Unit : mm